




Product Data Sheet

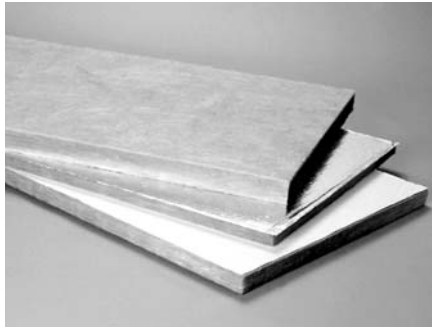

- Type 701
- Type 703
- Type 705
- Type 706
- Type 707

Description

700 Series Insulations are made of inorganic glass fibers with a thermosetting resin binder and formed into flexible, semi-rigid or rigid rectangular boards of varying densities. Types 703 and 705 are available with factory-applied FRK or poly encapsulated ASJ Max facings. Both facings are vapor retarders and provide a neat, finished appearance in mechanical applications.

Key Features

- 700 Series FIBERGLAS™ Insulations save energy and reduce heat transfer, lowering operating costs.
- Available in five types, providing a selection of products to meet specific performance, appearance and economic requirements.
- The ASJ Max facing is tougher³ than standard ASJ. It has a polymer coating that helps resist

3. Based on burst strength testing.

4. ASJ Max jacket does not support mold growth when tested in accordance with ASTM C1338.

Physical Property Data

Property	Test Method	Value	
Equipment Operating Temperature Limitation ¹	ASTM C411	0 to 450°F (-18°C to 232°C)	
Insulation Jacket Temperature Limitation	ASTM C1136	-20°F to 150°F (-29°C to 66°C)	
Jacket Permeance	ASTM E96, Proc. A	0.02 perm	
Jacket Burst Strength	ASTM D774	FRK: 35 psi; ASJ Max: 100 psi	
Compressive Strength (minimum) at 10% deformation at 25% deformation	ASTM C165	Type 703	Type 705
		25 lb/ft ² (1197 Pa) 90 lb/ft ² (4309 Pa)	200 lb/ft ² (9576 Pa) —
Water Vapor Sorption	ASTM C1104	<2% by weight at 120°F (49°C), 95% R.H.	
Nominal Density	ASTM C167	Type 701: 1.5 pcf (24 kg/m ³)	
	ASTM C303	Type 703: 3.0 pcf (48 kg/m ³)	
		Type 705, 706: 6.0 pcf (96 kg/m ³)	
		Type 707: 7.0 pcf (112 kg/m ³)	
Surface Burning Characteristics ²	UL 723, ASTM E84 or CAN/ULC-S102	Flame Spread: 25 Smoke Developed: 50	

1. Maximum thickness at 450°F (232°C): Type 701: 6" (152mm); Type 703, 705, 706: 4" (102mm).

2. The surface burning characteristics of these products have been determined in accordance with UL 723, ASTM E84 or CAN/ULC-S102. This standard should be used to measure and describe the properties of materials, products or assemblies in response to heat and flame under controlled laboratory conditions and should not be used to describe or appraise the fire hazard or fire risk of materials, products or assemblies under actual fire conditions. However, results of this test may be used as elements of a fire risk assessment which takes into account all of the factors which are pertinent to an assessment of the fire hazard of a particular end use. Values are reported to the nearest 5 rating.

water staining and yellowing, and does not support mold or mildew growth⁴.

- The ASJ Max facing can resist short durations of liquid water exposure that can occur during construction.
- Resists damage and maintains structural integrity and efficiency.
- Efficiently reduces sound transmission.
- Lightweight and resilient, 700 Series products are easy to handle, fabricate on the job site and install.

- 700 Series FIBERGLAS™ Insulations are available in:
 - 24"x48" (610mm x 1,219mm) in thicknesses from 1" (25mm) to 4" (102mm) in ½" (13mm) increments
 - Maximum thickness, Type 705, is 3" (76mm)
 - Maximum thickness, Type 706, 707, is 2" (51mm)

Product Applications

701—Lightweight and flexible, it is used as acoustic insulation batts and to insulate items with irregular surfaces where an exterior finish will be supported mechanically.

703—Semi-rigid boards for use on mechanical equipment and air conditioning ductwork.




Product Data Sheet


703 and 705 Series Recommended Impaling Pin Patterns

Pins should be located 3-8" from the edges of the board

Walls: 703 and 705 Series Insulation

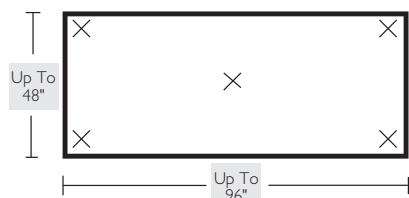

Ceilings: 703 and 705 Series Insulation

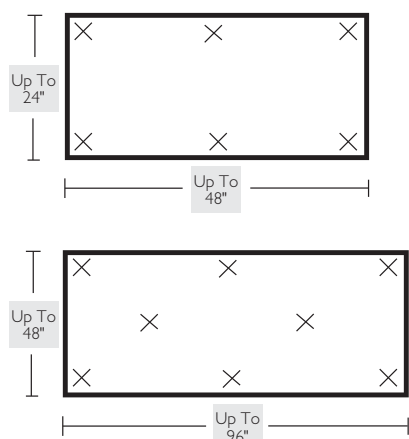

705—A high strength rigid board for use on chillers, other mechanical equipment, and heating and air conditioning ductwork, where high abuse resistance and good finished appearance is important.

706 and 707—Smooth surface, high density rigid boards used for acoustical wall panels and specialized ceiling applications.

Technical Information

Type 701 is a lightweight, unfaced, flexible insulation in batt form for use on objects having irregular surfaces, where the compressive strength is not a performance criterion.

Thermal Performance

ASTM C680 (Type 703)

Thickness in. (mm)	Operating Temperature, °F (°C)									
	250 (121)		300 (149)		350 (177)		400 (204)		450 (232)	
	HL	ST	HL	ST	HL	ST	HL	ST	HL	ST
1.0 (25)	27	98	42	106	57	114	75	123	95	133
1.5 (38)	19	93	29	99	40	105	52	112	66	119
2.0 (51)	15	90	22	95	31	100	40	105	50	111
2.5 (64)	12	88	18	92	25	96	32	101	41	106
3.0 (76)	10	87	15	91	21	94	27	98	34	102
3.5 (89)	9	86	13	89	18	92	23	96	30	99
4.0 (102)	8	86	11	88	16	91	21	94	26	97

The above table provides approximate heat loss values (HL), Btu/hr•ft², and Surface Temperatures (ST), °F, for flat surfaces. Values are based on horizontal heat flow, vertical flat surface, 80°F ambient temperature, still air, ASJ Max facing. To convert heat loss values to W/m², multiply values by 3.15. To convert surface temperatures, use the formula: °C = (°F-32)/1.8. For similar information using other assumptions, contact your Owens Corning Representative.

Sound Absorption Coefficients

ASTM C423; Mounting: Type A—Material placed against a solid backing.

Product Type	Thickness		Octave Band Center Frequencies, Hz						NRC
	in.	(mm)	125	250	500	1000	2000	4000	
701, unfaced	1	(25)	0.17	0.33	0.64	0.83	0.90	0.92	0.70
	2	(51)	0.22	0.67	0.98	1.02	0.98	1.00	0.90
703, unfaced	1	(25)	0.11	0.28	0.68	0.90	0.93	0.96	0.70
	2	(51)	0.17	0.86	1.14	1.07	1.02	0.98	1.00
705, unfaced and 706 smooth surface	1	(25)	0.02	0.27	0.63	0.85	0.93	0.95	0.65
	2	(51)	0.16	0.71	1.02	1.01	0.99	0.99	0.95
703, FRK	1	(25)	0.18	0.75	0.58	0.72	0.62	0.35	0.65
	2	(51)	0.63	0.56	0.95	0.79	0.60	0.35	0.75
705, FRK	1	(25)	0.27	0.66	0.33	0.66	0.51	0.41	0.55
	2	(51)	0.60	0.50	0.63	0.82	0.45	0.34	0.60
703, ASJ Max	1	(25)	0.17	0.71	0.59	0.68	0.54	0.30	0.65
	2	(51)	0.47	0.62	1.01	0.81	0.51	0.32	0.75
705, ASJ Max	1	(25)	0.20	0.64	0.33	0.56	0.54	0.33	0.50
	2	(51)	0.58	0.49	0.73	0.76	0.55	0.35	0.65

Values given are for design approximations only; production and test variabilities will alter results. Specific designs should be evaluated in end-use configurations.

Types 703 and 705 are board insulations usually impaled over welded pins on flat surfaces. They are cut in segments and banded in place on irregular surfaces. Unfaced boards are normally finished with reinforced insulating cement or weatherproof mastic.

Installation

700 Series Insulation can be easily cut with a knife and fit neatly into irregularly shaped areas.

Boards with ASJ Max or FRK facings shall be applied using mechanical fasteners such as weld pins or speed clips. Fasteners shall be located not less than 3" (75mm) from each edge or corner of the board.

Pin spacing along the equipment should be no greater than 12" (300mm) on centers. Additional pins or clips may be required to hold the insulation tightly against



Product Data Sheet

Thermal Conductivity

Mean Temp. °F	k, Btu•in/hr•ft²•°F			Mean Temp. °C	λ, W/m•C		
	701	703	705, 706		701	703	705, 706
50	0.22	0.21	0.22	10	0.032	0.030	0.032
75	0.24	0.23	0.23	25	0.035	0.033	0.034
100	0.26	0.24	0.25	50	0.040	0.036	0.037
150	0.30	0.27	0.27	75	0.045	0.040	0.041
200	0.35	0.30	0.30	100	0.052	0.045	0.045
250	0.40	0.34	0.33	125	0.059	0.050	0.049
300	0.46	0.38	0.37	150	0.067	0.055	0.053

the surface where cross breaking is used for stiffening. Weld pin lengths must be selected for tight fit but avoid "oil-canning."

In multiple layer applications, use faced material on outer layer only.

Where a vapor retarder is required, cover pins and clips with vapor sealing, pressure-sensitive patches matching insulation facing. Rub hard with a plastic sealing tool for a tight bond and a vapor seal.

All insulation joints should be sealed with pressure-sensitive joint sealing tape to match the insulation facing. Rub hard with a plastic sealing tool to effect a tight bond. Recommended practice suggests 3" (76mm) wide tape on flat surfaces or where edges are shiplapped and stapled. Use 5" (102mm) wide tape in lieu of shiplapping. If insulation is being applied to sheet metal duct work, all sheet metal joints must be sealed prior to insulating. Glass fabric and mastic may be used in lieu of pressure-sensitive tape.

For Vertical Applications

700 Series Insulation can be installed between furring strips, hat channels and Z-shaped furring where a finish will be applied. For exposed applications, the product

can be impaled on impaling pins or adhered with adhesive.

For Horizontal Applications

700 Series Insulation can be installed on horizontal surfaces by using impaling pins.

On Curtainwalls

700 Series Insulation is easily installed by mounting on impaling pins or holding in place with supporting clips designed for the application. Follow curtainwall manufacturer's instructions for clearance.

On Masonry Construction

700 Series Insulation can be installed between wythes, on the interior face with stick pins, or by using appropriate adhesives.

On Precast Concrete

700 Series Insulation can be installed using impaling pins or appropriate adhesives.

When using adhesive, follow adhesive manufacturer's recommendations for surface preparation and adhesive pattern.

When using impaling pins, follow pin manufacturer's recommendations for surface preparation. Lengths should be selected for tight fit. Protect pin tips where subject to contact. Pins

should be located 3"-8" from the edge(s) of the board.

Maintaining the integrity of the vapor retarder is important for effective moisture/humidity control. Repair any punctures or tears in the facing by taping with a matching pressure sensitive tape.

Product should be kept dry during shipping, storage and installation.

Standards, Codes Compliance

- ASTM C553, Mineral Fiber Blanket Thermal Insulation, Type III – Type 701
- ASTM C612, Mineral Fiber Block & Board Thermal Insulation, Types IA, IB – Types 703, 705, 706, 707
- ASTM C795, Thermal Insulation For Use Over Austenitic Stainless Steel¹ (except 701)
- ASTM C1136, Flexible Low Permeance Vapor Retarders for Thermal Insulation, Type I: ASJ Max; Type II: FRK
- Nuclear Regulatory Commission Guide 1.36, Non-Metallic Thermal Insulation¹ (except 701)
- Doesn't contain the fire retardant decabrominated diphenyl ether (decaBDE)
- CAN/CGSB-51.10 – Type I, Class I – Types 703
- NFPA 90A and 90B
- California Insulation Quality Standards CA-T052

¹ Preproduction qualification testing complete and on file. Chemical analysis of each production lot required for total conformance. Certification needs to be specified at time of order.



Product Data Sheet

Certifications and Sustainable Features of 700 Series FIBERGLAS™ Insulation

- Certified by SCS Global Services to contain a minimum of 53% recycled glass content, 31% pre-consumer and 22% post-consumer.

Environmental and Sustainability

Owens Corning is a worldwide leader in building material systems, insulation and composite solutions, delivering a broad range of high-quality products and services.

Owens Corning is committed to driving sustainability by delivering solutions, transforming markets and enhancing lives. More information can be found at <http://sustainability.owenscorning.com>.

Disclaimer of Liability

Technical information contained herein is furnished without charge or obligation and is given and accepted at recipient's sole risk. Because conditions of use may vary and are beyond our control, Owens Corning makes no representation about, and is not responsible or liable for the accuracy or reliability of data associated with particular uses of any product described herein.

SCS Global Services provides independent verification of recycled content in building materials and verifies recycled content claims made by manufacturers. For more information, visit www.SCSglobalservices.com.



AVERAGE 53% RECYCLED CONTENT
31% PRE-CONSUMER
22% POST-CONSUMER



OWENS CORNING INSULATING SYSTEMS, LLC
ONE OWENS CORNING PARKWAY
TOLEDO, OHIO 43659
1-800-GET-PINK®
www.owenscorning.com

Pub. No. 14775-V. Printed in U.S.A. June 2015. THE PINK PANTHER™ & © 1964-2015 Metro-Goldwyn-Mayer Studios Inc. All Rights Reserved. The color PINK is a registered trademark of Owens Corning. © 2015 Owens Corning. All Rights Reserved.

